



ePool Peristaltic Pumps




Flow rate (L/H)	Max Pressure (Bar)	Power Consumption (Watts)	Standard Power Supply	Nett Weight (Kg)
1.5	1.5	10	100 - 250 V 50 - 60 Hz	1.5
3	1.5			
2	2			
3	3			

The ePool Peristaltic Dosing Pump

The ePool series of peristaltic dosing pumps are perfect for the leisure industry and feature built-in pH and Rx control. These pumps operate on the suction-compression created by rotors on a Santoprene® tube. They are energy efficient and have an operating range of 6-10 W energy consumption. The pumps have a maximum flow rate of 3 L/H and a maximum operating pressure of 3 bar.

Product Information:

- pH measurement from 4-9 pH
- Rx Measurement -300 to +900 mV
- Peristaltic Pump with built in pH or Rx controller
- Proportional dosing
- Overdose Alarm
- Level Switch input
- Energy efficient
- Set point selection
- Hysteresis
- Pump activation delay
- Relay output
- On/Off modes for proportional dosing

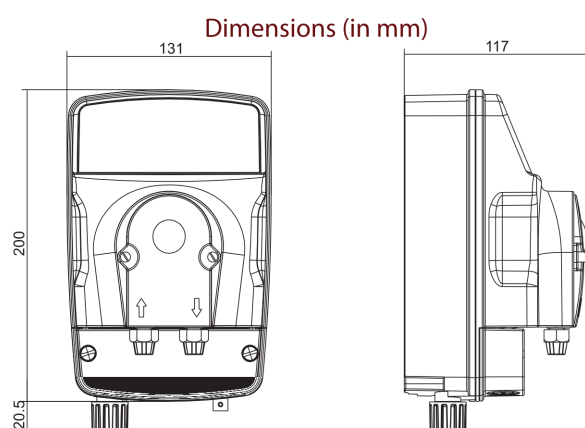

Etatron GB (UK Branch Office)

Lindum Business Park, Station Road,
North Hykeham, Lincoln, LN6 3QX

Tel: +44 1522 852 397 Fax: +44 1522 500 377
www.etatron.co.uk info@etatron.co.uk

Etatron D.S. (Head Office)

Via Dei Ranuncoli, 53 - 00134 Roma ITALY

Tel: +39 06 93 49 891 Fax: +39 06 93 43 924
www.etatronds.it info@etatronds.com