



AG-Select B2 & B3 Controllers

TECHNICAL FEATURES

- 2 or 3 measurement channels
- pH, RX, Cl, PPM and temperature measures in the following range:
 - pH Measure: 0 to 14
 - Rx Measure: -1000 to +1400 mV
 - Cl/PPM Measures: 0 to 2, 0 to 20, 0 to 200 PPM
 - Temperature Measure: 0 to 100 °C (PT100)
- ON/OFF or proportional mode
- Hysteresis on measurement
- Expert & Simple modes
- Min/Max Alarm Output
- Temperature measure & compensation
- Password Protection
- Timer
- 4-20mA output for each measuring channel

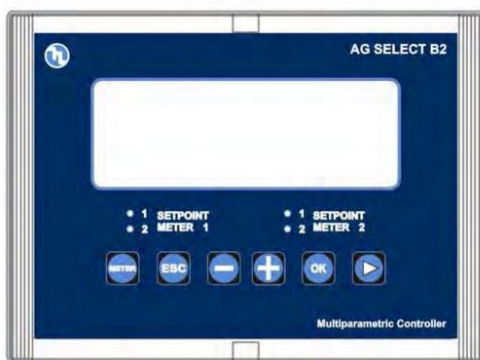

AG-Select B2

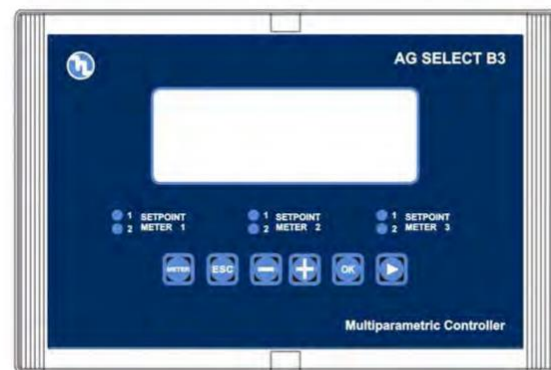

AG-Select B3

The AG-Select range is a popular series of multi-channel controllers suitable for measuring and regulating dosing for a number of applications.

The AG-Select is available with either dual (B2) or triple (B3) measurement channels, with each channel being independently configurable. Each measurement channel is also equipped with 4-20 mA output. These controllers feature password protection and Simple/Expert modes in addition to data recording with PC/network connectivity.

There is an Alarm relay output for Min/Max and level switch to indicate low chemical levels in a storage tank. The controller can also be set to work on a timetable with the timer function.


AG-Select B2 & B3 Controllers

CONFIGURATIONS

MODEL	
CXB10	2 or 3 Channel Controller
FEATURES	
05101	2 Channels
10101	3 Channels

DIMENSIONS

AG-Select B2

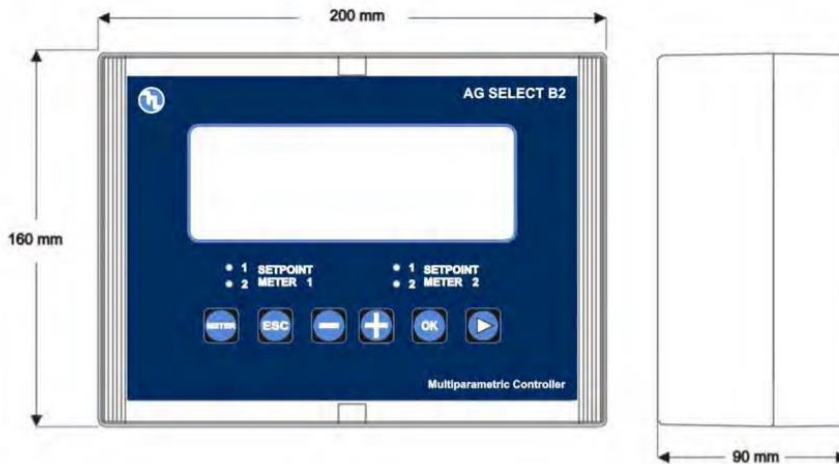

AG-Select B3

