



DLX MULTIFLOW MA

Analogical dosing pump with selection of flow-rate/backpressure and manual flow rate adjustment
The DLX MultiFlow MA is an electromagnetic pump with constant flow rate, manually adjustable via a potentiometer. Max flow rate/working pressure can be selected by the user

GENERAL FEATURES

- Manual adjustment of flow rate
- Regulation range: 0-100%
- Level probe input
- Acid resistant plastic box
- IP65 protection degree
- Max Flow rate: 50 l/h; Max backpressure: 16 bar
- Wall or horizontal basement mounting
- Standard pump head: in PVDF (PP on request), diaphragm in PTFE, seats in FPM, ceramic ball valves*
- Standard power supply: 220-240V**
- Models selectable from the user
- CE certification

* further configurations available on request

** other power supplies available on request



Model A			Model B			Model C		
L/h	bar	Pulses/min.	L/h	bar	Pulses/min.	L/h	bar	Pulses/min.
2	16	11	30	3	214	8	7	150
5	12	146	40	1	240	10	5	170
8	10	222	50	0	300	20	2	250



Installation kit PVDF-FPM

DLX MultiFlow pumps, PVDF pump head version, are supplied with standard PVDF-FPM installation kit: PE (4x6mm) delivery tube, PVC CRYSTAL (4x6mm) suction tube, PVDF foot filter, PVDF injection valve.

Code	Description
PMF014205E	Multiflow-A MA 8-10 240V PVDF/FPM/Cer.
PMF014195E	Multiflow-B MA 50-0 240V PVDF/FPM/Cer.
PMF014185E	Multiflow-C MA 20-2 240V PVDF/FPM/Cer.


Code	Description
PMF014205G	Multiflow-A MA 8-10 240V PVDF/EPDM/Cer.
PMF014195G	Multiflow-B MA 50-0 240V PVDF/EPDM/Cer.
PMF014185G	Multiflow-C MA 20-2 240V PVDF/EPDM/Cer.



TECHNICAL FEATURES

Model	Max Flow Rate l/h (US GI/h)	Max Pressure Bar (PSI)	Max Frequency (strokes/min)	cc/Stroke	Power Supply (Volts -Hz)	Weight (Kg)
A	2 (0.53)	16 (232)	111	0.30	230V - 50-60 Hz	2.3
	5 (1.32)	12 (174)	146	0.57	230V - 50-60 Hz	2.3
	8 (2.11)	10 (145)	222	0.60	230V - 50-60 Hz	2.3
B	30 (7.93)	3 (43.5)	214	2.34	230V - 50-60 Hz	2.3
	40 (10.57)	1 (14.5)	240	2.78	230V - 50-60 Hz	2.3
	50 (13.21)	0 (0)	300	2.78	230V - 50-60 Hz	2.3
C	8 (2.12)	7 (102)	150	0.89	230V - 50-60 Hz	2.3
	10 (2.64)	5 (72.5)	170	0.98	230V - 50-60 Hz	2.3
	20 (5.28)	2 (29)	250	1.33	230V - 50-60 Hz	2.3

LOW RATE (L/H) – PRESSURE (BAR)

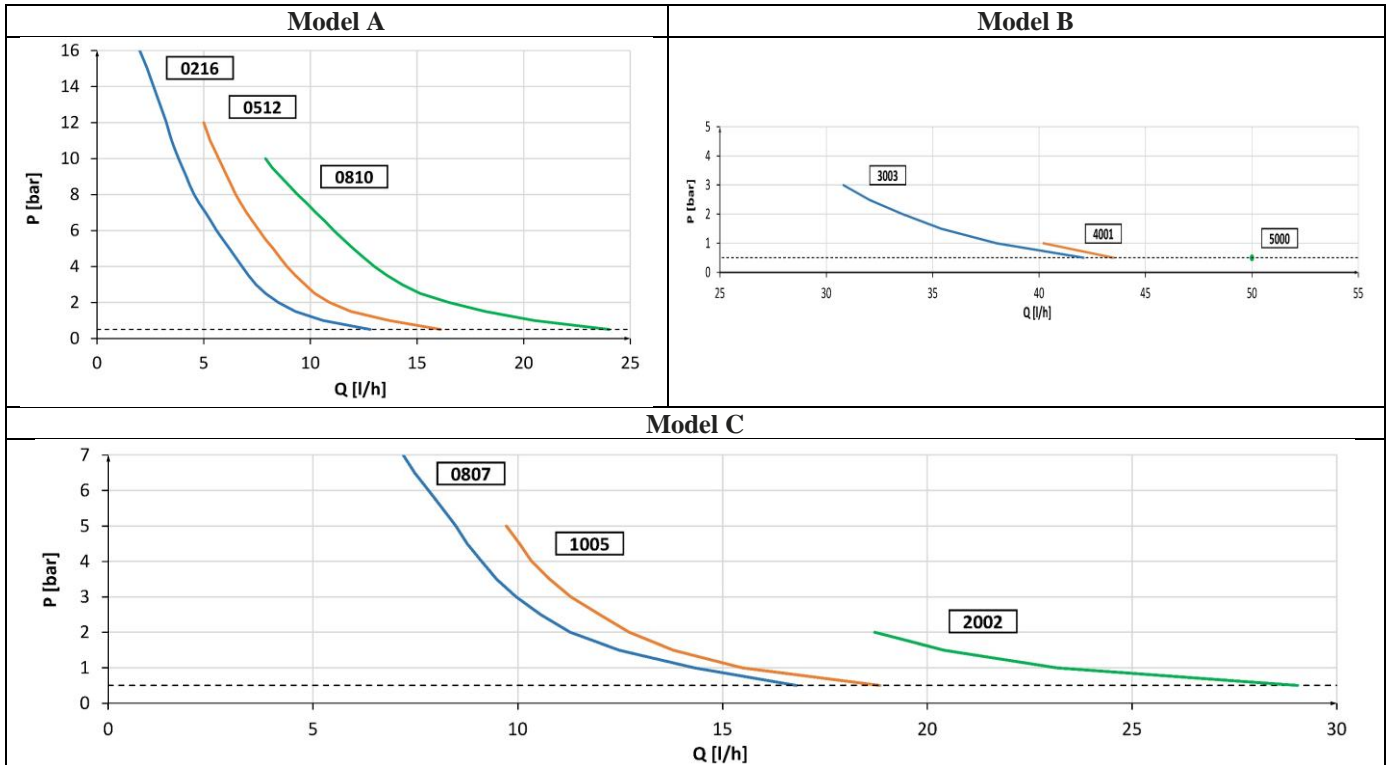

OVERALL DIMENSIONS

